


▶ Range of Application


ELLI

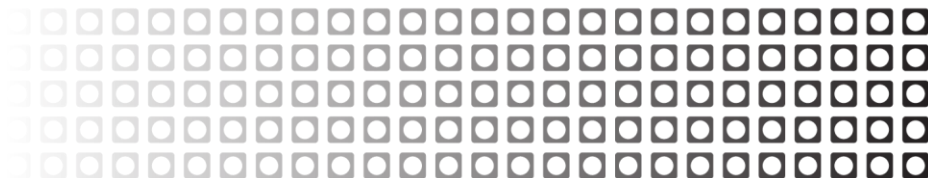

Contents

ELLI	3
Technical Specifications: ELLI EN81-20	4
Technical Specifications: ELLI EN81-41	6
Technical Specifications: ELLI 2006/42	9

ELLI

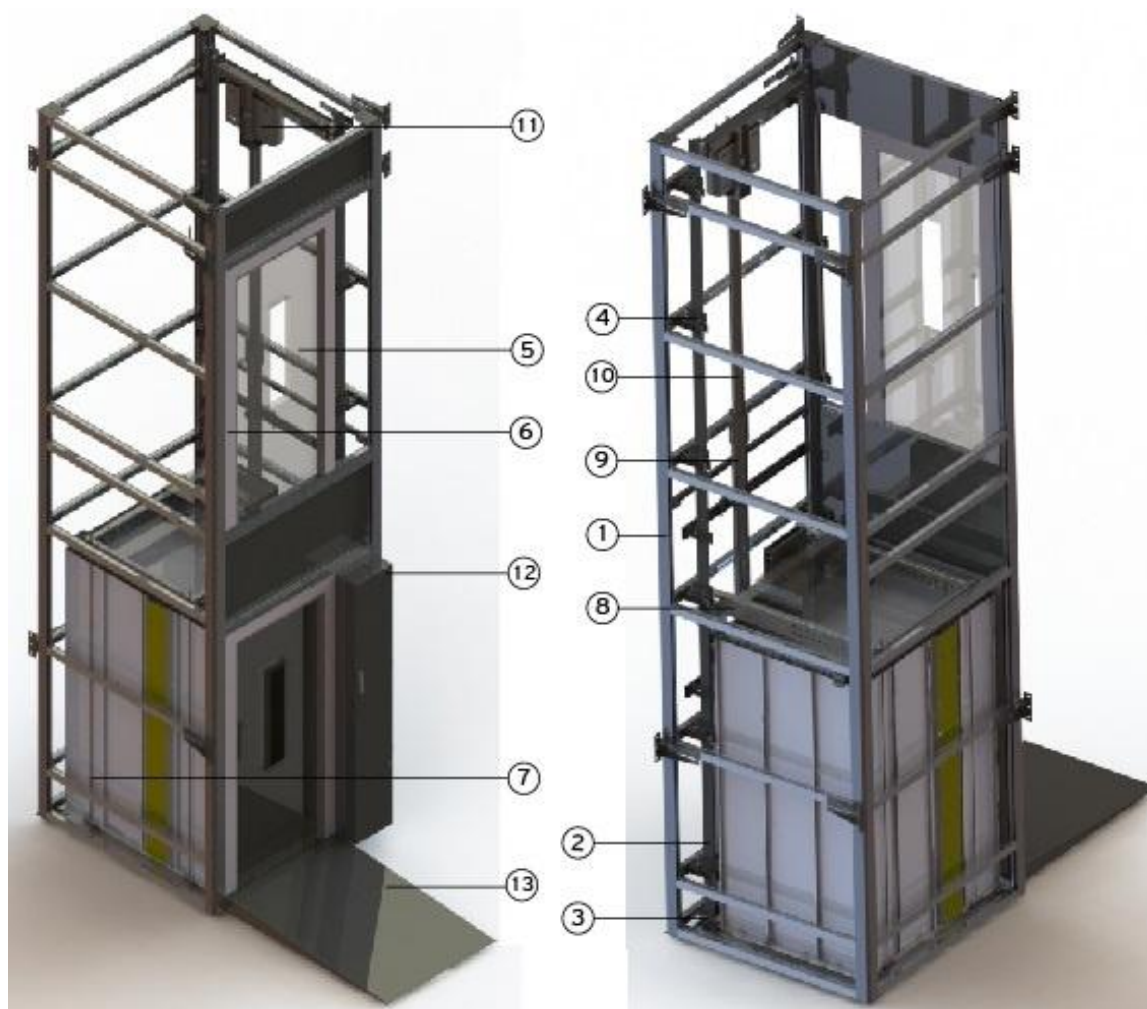

1	Aluminum Shaft
2	Guide Rails
3	Guide Rails Base
4	Wall/Guide Rails Brackets
5	Semi-automatic Doors
6	Floor Registration Panel
7	Cabin
8	Car Sling Frame
9	Cylinder
10	Piston
11	Suspension Sheave
12	Cabinet
13	Wheelchair Ramp

Technical Specifications: ELLI EN81-20



Lift Type	ELLI LPH		
Max. Capacity	300Kg	450Kg	630Kg
Max. Speed	0.63 m/s	0.63 m/s	0.63 m/s
Min. PIT EN81-21	170mm	170mm	170mm
Min. PIT Beyond EN81-20/21	130mm	130mm	170mm
Min. Headroom EN81-20	3350mm	3350mm	3350mm
Min. Headroom EN81-21	2680mm*	2680mm*	2750mm*
Car guide Rails:	T70x65x9	T82.5x68x9	T89x62x16
Max. travel:	20000mm	20000mm	20000mm
Distance A (Min.)	300mm / 400mm*	300mm / 400mm*	340mm / 400mm*
Standard Shaft	1300x1350	1400x1600	1550x1800
Standard Cabin	900x1000	1000x1250	1100x1400
Standard Door	700mm 2PT	700mm 2PT	900mm 2PT


Internal cabin height: 2100mm

Plastic cabin floor

Single Entrance

Min. Headroom only in case of having concrete shaft roof

*Automatic side sliding door

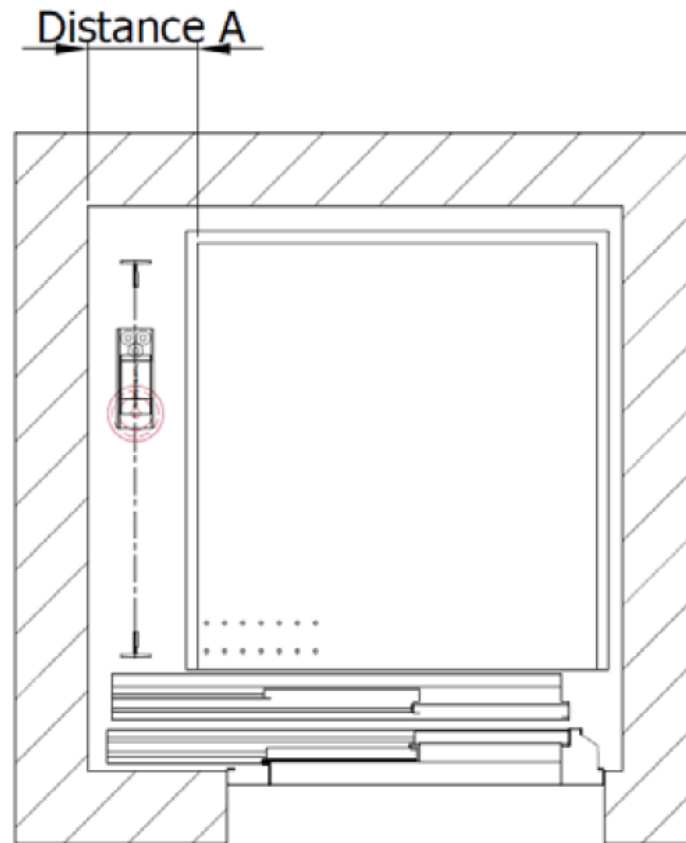

- Max Load: 500kg
- Low pit and headroom appliance
- Easy installation (Guides at one side)
- Easy maintenance
- Competitive price
- Quick production and delivery times
- Conformity with EN81-20

Technical Specifications: ELLI EN81-41




Lift Type	ELLI LPH		
Max. Capacity	250Kg	320Kg	400Kg
Max. Speed	0.15 m/s	0.15 m/s	0.15 m/s
Min. PIT EN81-41	130mm	130mm	130mm
Min. Headroom EN81-41	2620mm	2620mm	2620mm
Car guide Rails:	T70x65x9	T82.5x68x9	T89x62x16
Max. travel:	12000mm	12000mm	12000mm
Distance A (Min.)	300mm	300mm	300mm
Standard Shaft	1200x1450	1300x1600	1500x1600
Standard Cabin	800x1250	900x1400	1100x1400
Standard Door	700mm	800mm	900mm

- Internal cabin height: 2100mm
- Plastic cabin floor
- Hinged landing doors
- Without cabin doors
- Hinged roof
- Min. Headroom only in case of having concrete shaft roof



Lift Type	ELLI LH		
	250Kg	320Kg	400Kg
Max. Capacity	250Kg	320Kg	400Kg
Max. Speed	0.15 m/s	0.15 m/s	0.15 m/s
Min. PIT EN81-41	300mm	300mm	320mm
Min. Headroom EN81-41	2500mm	2500mm	2500mm
Car guide Rails:	T70x65x9	T82.5x68x9	T89x62x16
Max. travel:	12000mm	12000mm	12000mm
Distance A (Min.)	300mm	300mm	300mm
Standard Shaft	1200x1450	1300x1600	1500x1600
Standard Cabin	800x1250	900x1400	1100x1400
Standard Door	700mm	800mm	900mm

- Internal cabin height: 2100mm
- Plastic cabin floor
- Hinged landing door
- Without cabin doors
- Min. Headroom only in case of having concrete shaft roof

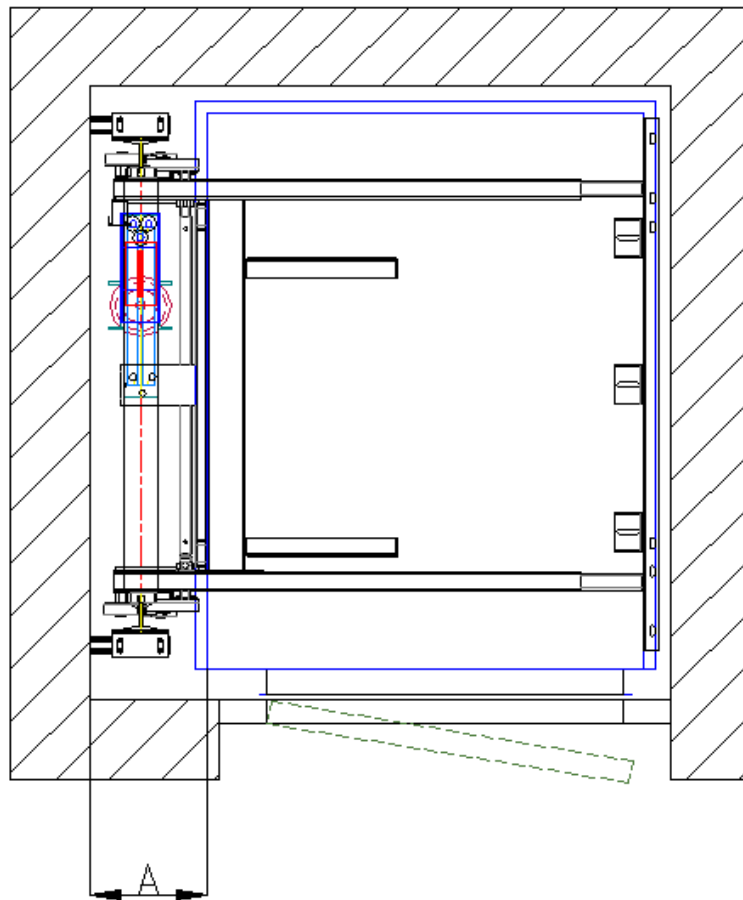

- Max Load: 500kg
- Low pit and headroom appliance
- Easy installation (Guides at one side)
- Easy maintenance
- Competitive price
- Quick production and delivery times
- Conformity with EN81-41

Technical Specifications: ELLI 2006/42



Lift Type	ELLI LPH		
Max Capacity	250Kg	320Kg	400Kg
Max Speed	0.15 m/s	0.15 m/s	0.15 m/s
Min PIT	170mm	170mm	170mm
Min. Headroom	2620mm / 2680mm*	2620mm / 2680mm*	2670mm / 2730mm*
Car guide Rails:	T70x65x9	T82.5x68x9	T89x62x16
Max travel:	12000mm	12000mm	12000mm
Distance A	400mm* / 340mm** / 300mm***	400mm* / 340mm** / 300mm***	400mm* / 340mm** / 300mm***
Standard Shaft	1250x1600	1300x1750	1600x1750
Standard Cabin	800x1250	900x1400	1100x1400
Standard Door	700mm	700mm	900mm

Internal cabin height 2100

Plastic cabin floor

Single entrance

Semi-automatic with car doors

or

*Automatic side sliding doors

** Car sling type LPH1.2

***Car sling type LPH1.1

Min. Headroom only in case of having concrete shaft roof



Lift Type	ELLI LH		
Max. Capacity	250Kg	320Kg	400Kg
Max. Speed	0.15 m/s	0.15 m/s	0.15 m/s
Min. PIT	300mm	300mm	320mm
Min. Headroom	2500mm / 2600mm*	2500mm / 2600mm*	2500mm / 2600mm*
Car guide Rails:	T70x65x9	T82.5x68x9	T89x62x16
Max. travel:	12000mm	12000mm	12000mm
Distance A (Min. Distance A)	400mm* / 300mm	400mm* / 300mm	400mm* / 300mm
Standard Shaft	1250x1600	1300x1750	1600x1750
Standard Cabin	800x1250	900x1400	1100x1400
Standard Door	700mm	700mm	900mm

Internal cabin height: 2100mm


Plastic cabin floor

Semi-automatic with car doors

or

*Automatic side sliding doors

Min. Headroom only in case of having concrete shaft roof

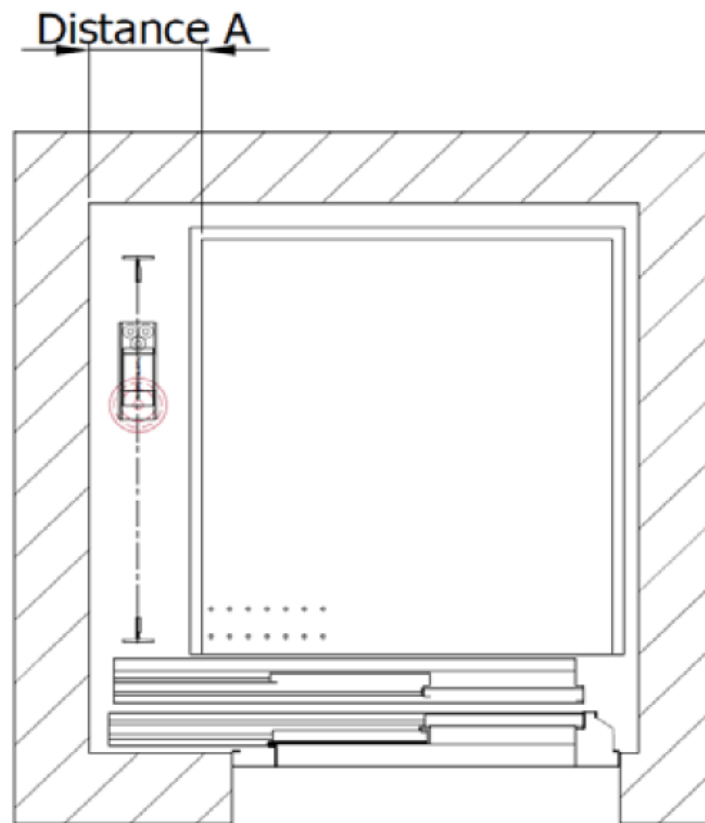

- Max Load: 500kg
- Low pit and headroom appliance
- Easy installation (Guides at one side)
- Easy maintenance
- Competitive price
- Quick production and delivery times
- Conformity with Directive 2006/42/EC