

ELLI MAX

HYDRAULIC CAR LIFT

FEATURES

INDIRECT ACTING

MAX. SPEED 0.63M/S

AUTOMATIC DOORS AVAILABLE

CONFORMITY WITH EN 81-20/50

COMPLIANCE WITH LIFTS

DIRECTIVE 2014/33/EU

USAGE: CIVIC BUILDINGS

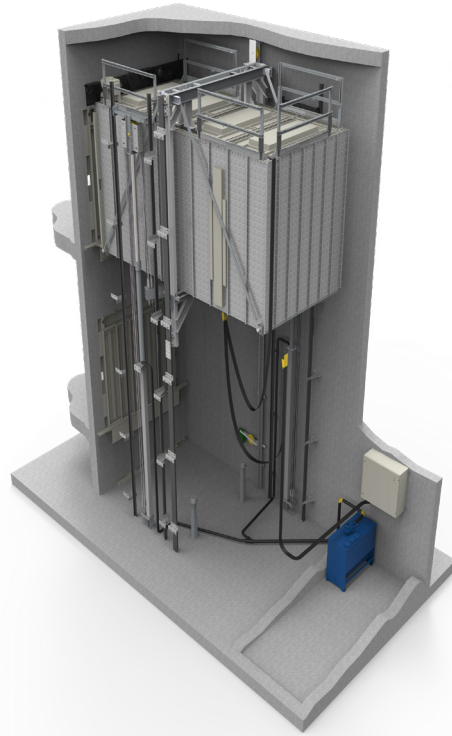


TABLE 7 (SINGLE ENTRANCE)	MAX. CAPACITY [KG] ^[4]	3600	3800	4000	4200	5000
	MAX. SPEED [M/S]	0.63	0.63	0.63	0.63	0.63
	MIN. PIT [MM] ^[1]	1350	1350	1350	1350	1400
	MIN. HEADROOM [MM] ^{[1][3]}	3500	3800	4100	4400	4400
	MIN. PIT [MM] ^[2]	1000	1000	1000	1000	1050
	MIN. HEADROOM [MM] ^{[2][3]}	3000	3300	3600	3900	3900
	MAX. TRAVEL [MM]	25000	25000	25000	25000	21000
	STANDARD SHAFT [MM]	3300X5900	3400X6000	3500X6100	3650X6200	4200X6500
	STANDARD CABIN [MM]	2400X5400	2500X5500	2600X5600	2700X5700	3100X6000
	STANDARD DOOR [MM]	2300	2400	2500	2600	3000

TABLE 7 (DOUBLE ENTRANCE)	MAX. CAPACITY [KG] ^[4]	3600	3800	4000	4200	5000
	MAX. SPEED [M/S]	0.63	0.63	0.63	0.63	0.63
	MIN. PIT [MM] ^[1]	1350	1350	1350	1350	1400
	MIN. HEADROOM [MM] ^{[1][3]}	3400	3400	3700	3900	3900
	MIN. PIT [MM] ^[2]	1000	1000	1000	1000	1050
	MIN. HEADROOM [MM] ^{[2][3]}	2900	2900	3200	3400	3400
	MAX. TRAVEL [MM]	25000	25000	25000	25000	21000
	STANDARD SHAFT [MM]	3300X6150	3400X6250	3500X6350	3650X6450	4200X6750
	STANDARD CABIN [MM]	2400X5400	2500X5500	2600X5600	2700X5700	3100X6000
	STANDARD DOOR [MM]	2300	2400	2500	2600	3000

[1] EN 81-20/50

[2] EN 81-21

[3] INTERNAL CABIN HEIGHT 2100MM

[4] ACCORDING TO EN 81-20 5.4.2.2

